


**DATENBLATT / TECHNICAL DATA SHEET TA15AX**

Frei abblasendes Sicherheitsventil / Safety valve

Erstellt / made / établi : 15.01.2021

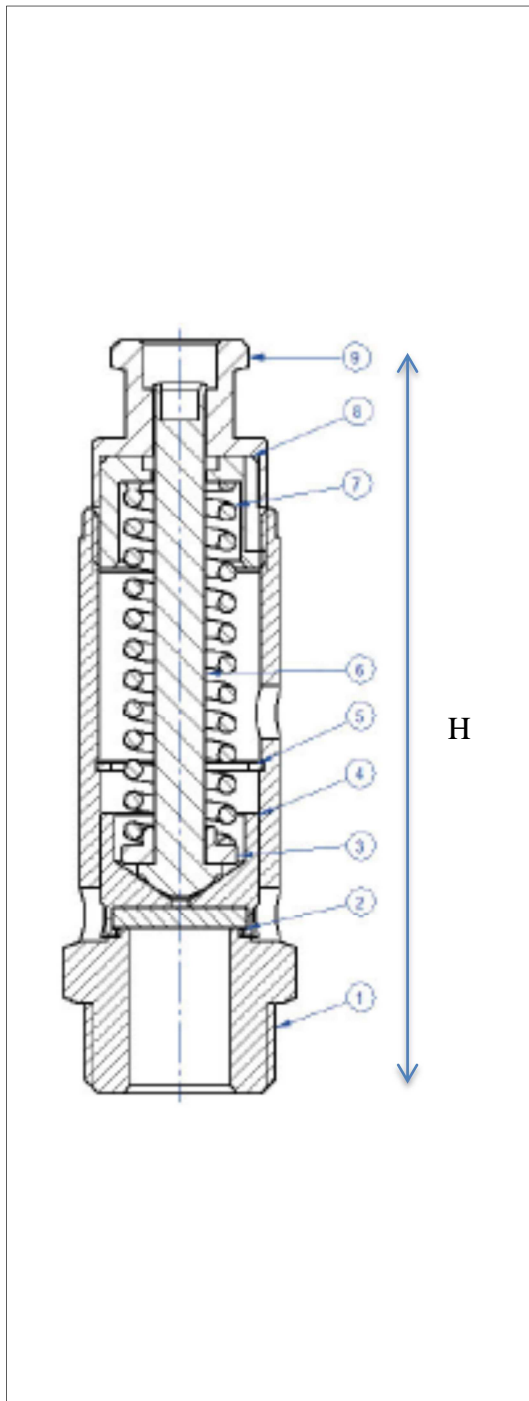

**Geeignet für**  
Adapted for  
Convenant pour



Luft  
air  
air

**Zulassung**  
homologation  
homologation

**CE** ISO 4126-1 - 2014/68/EU

**Anschlüsse**  
connections  
connexion

3/4"-M  
BSP – BSPT - NPT

**Nennweite DN**  
nominal Size  
diametres nominal

14 (D0=14mm)

**Druckbereich**  
pressure range  
plage de pression

4,0 bar – 16,0 bar

**Werkstoffe**  
material  
matériau

Messing / brass / laiton

**Dichtungen**  
gaskets  
joint

NBR (-10+80°C) - FKM/Viton (-10+200°C)

**K-Faktor** 0,8

**Abmessungen | dimension | dimension**

G	SW (CH) mm	H mm 0,5 – 18bar	
1/2 - 3/4"	28	Ca. 105	

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur

Pos. / Pos.	Denominazione / Name	Materiale / Material
1	Corpo valvola / Valve body	EN 12164 CW 614N
2	Pastiglia / Pad	NBR o FKM
3	Piattello / Cap	EN 12164 CW 614N
4	Otturatore / Shutter	EN 12164 CW 614N
5	Seeger / Snap ring	EN 10270-1-DH
6	Stelo / Rod	EN 10263-2-4
7	Molla / Spring	EN 10270-1-DH
8	Vite regolazione / Regulation screw	EN 12164 CW 614N
9	Dispositivo di prova / Test device	EN 12164 CW 614N