


DATENBLATT / TECHNICAL DATA SHEET TA21AX

Frei abblasendes Sicherheitsventil / Safety valve

Erstellt / made / établi : 15.01.2021

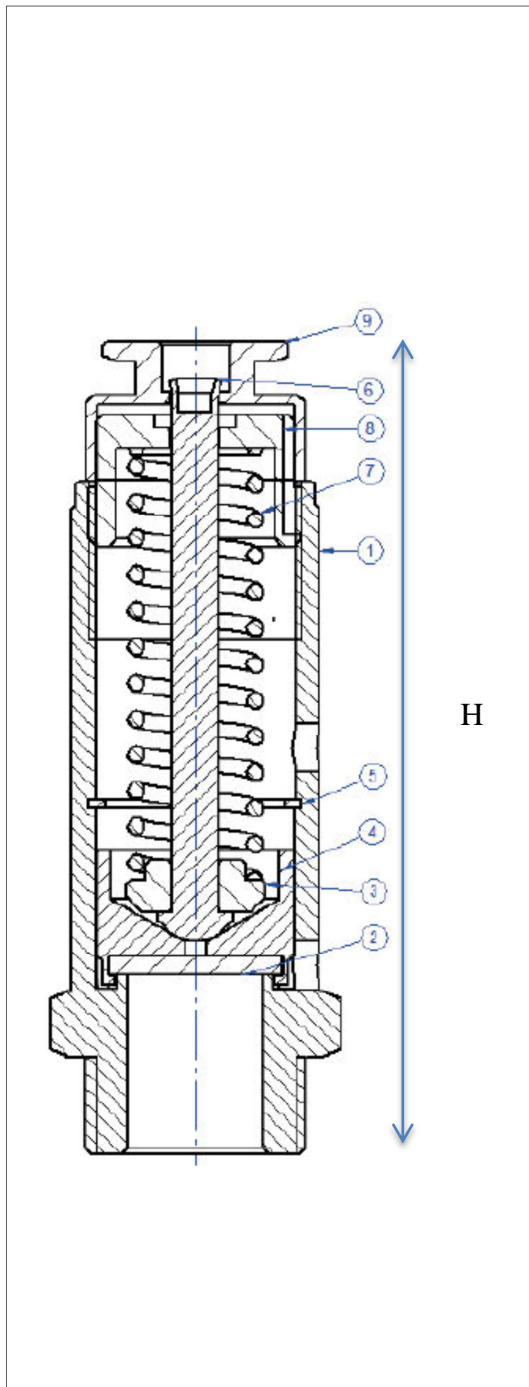

Geeignet für
Adapted for
Convenant pour



Luft
air
air

Zulassung
homologation



ISO 4126-1 - 2014/68/EU

Anschlüsse
connections
connexion

1"-M
BSP – BSPT - NPT

Nennweite DN
nominal Size
diametres nominal

21 (D0=20,5 mm)

Druckbereich
pressure range
plage de pression

2,0 bar – 16,0 bar

Werkstoffe
material
matériau

Messing / brass / laiton

Dichtungen
gaskets
joint

NBR (-10+80°C - FKM / Viton (-10+200°C)

k-Faktor

0,7

Abmessungen | dimension | dimension

F	SW (CH) mm	H mm 0,5 – 18bar	
1"	38	123	

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur

Pos. / Pos.	Denominazione / Name	Materiale / Material
1	Corpo valvola / Valve body	EN 12164 CW 614N
2	Pastiglia / Pad	NBR o FKM
3	Piattello / Cap	EN 12164 CW 614N
4	Otturatore / Shutter	EN 12164 CW 614N
5	Seeger / Snap ring	EN 10270-1-DH
6	Stelo / Rod	EN 10263-2-4
7	Molla / Spring	EN 10270-1-DH
8	Vite regolazione / Regulation screw	EN 12164 CW 614N
9	Dispositivo di prova / Test device	EN 12164 CW 614N